

Description

The Model INS3155 is a high power, class AB solid state amplifier which utilizes the latest GaN Technology to offer broadband performance from 300 to 2000MHz. Inspower’s ISO9001 quality management system assures consistent performance and highest reliability.

Product Features

- 50Ω RF impedance, Fully Integrated Matching
- 100W Output
- Single Supply Operation: Nominally 28V
- Built-in monitoring functions
- High reliability and ruggedness

Electrical Specifications @ +28.0VDC, 25°C, 50Ω System

Symbol	Parameter	Unit	Min.	Typ.	Max.
BW	Operating Frequency	MHz	300		2000
P _{SAT}	Power Output Saturated	Watt	100	125	
P _{1dB}	Power Output P1dB	Watt		50	
G _{1dB}	Power Gain	dB	50		
P _{IN}	Input Power for Rated P _{SAT}	dBm		0	3
ΔG _{SS}	Small Signal Gain Flatness	dB			±3.0
ΔG _P	Power Gain Flatness	dB			±2.0
S ₁₁	Input Return Loss	dB			-10
IP ₃	Third Order Intercept Point 2-Tone@37dBm/Tone, 1MHz Spacing	dBm		+50	
H	Harmonics @Pout=100W	dB		-25	
Spur	Spurious Signal	dBc		-70	-60
V _{DC}	Operation Voltage	Volt	26.0	28.0	30.0
I _{DD}	Current Consumption @Pout=100W	Amp		11.5	14
I _{DQ}	Quiescent Current	Amp		2.8	3.5
I _{sq}	Current Consumption @Shutdown	mA		100	200
T _{ON/OFF}	Switching Time	uSec		2	5

INS3155

300-2000MHz 100W Broadband GaN Power Amplifier



Mechanical Specification

Parameters	Value	Unit
Dimension (W × D × H)	235 * 90 * 27	mm
RF Connector Input/output	SMA Female	-
DC Interface Connector	D-Sub 9pin Male	-
Weight	1.1	Kg
Cooling	External Heat-sink	-

Environmental Characteristics

Parameters	Specifications	Remark
Operating Case Temperature Range	-40°C to +80°C	
Storage Temperature	-40°C to +85°C	
Relative Humidity non-condensing	95%	

Protection

Item	Specifications for Activation	Remark
Input Overdrive	+10dBm Max	
Load VSWR	∞: 1	
Thermal Degradation	85°C Min	

I/O Interface (D-sub 9pin Male)

Pin No	Pin Description	Specifications	Remark
1	NC	Not Connected	
2	Current Monitor	Analog Voltage Relative to IDD @ 25mV/100mA	
3	Temp Monitor	Vout=10mV/°C×Temp+500mV	
4	NC	Not Connected	
5	Shutdown	Enable: TTL "0" or Open Disable: TTL "1" = 3.3-5V	
6	VDD	+28VDC	
7	VDD	+28VDC	
8	GND	Ground	
9	GND	Ground	

Typical Characteristics @ +28VDC, 25°C

Plot 1 – Small Signal Gain

Top Curve: Small Signal Gain @ Pin= -20dBm

Reference: 55dB, 3dB/div

Bottom Curve: Input Return Loss

Reference: 20dB, 10dB/div



Plot 2 – Small Signal Gain & P_{SAT}

Top Curve: Small Signal Gain @ Pin= -20dBm


Middle Curve: Power Gain @ P_{SAT}, Pin= 0dBm

Reference: 55dB, 3dB/div

Bottom Curve: Input Return Loss

Reference: 20dB, 10dB/div



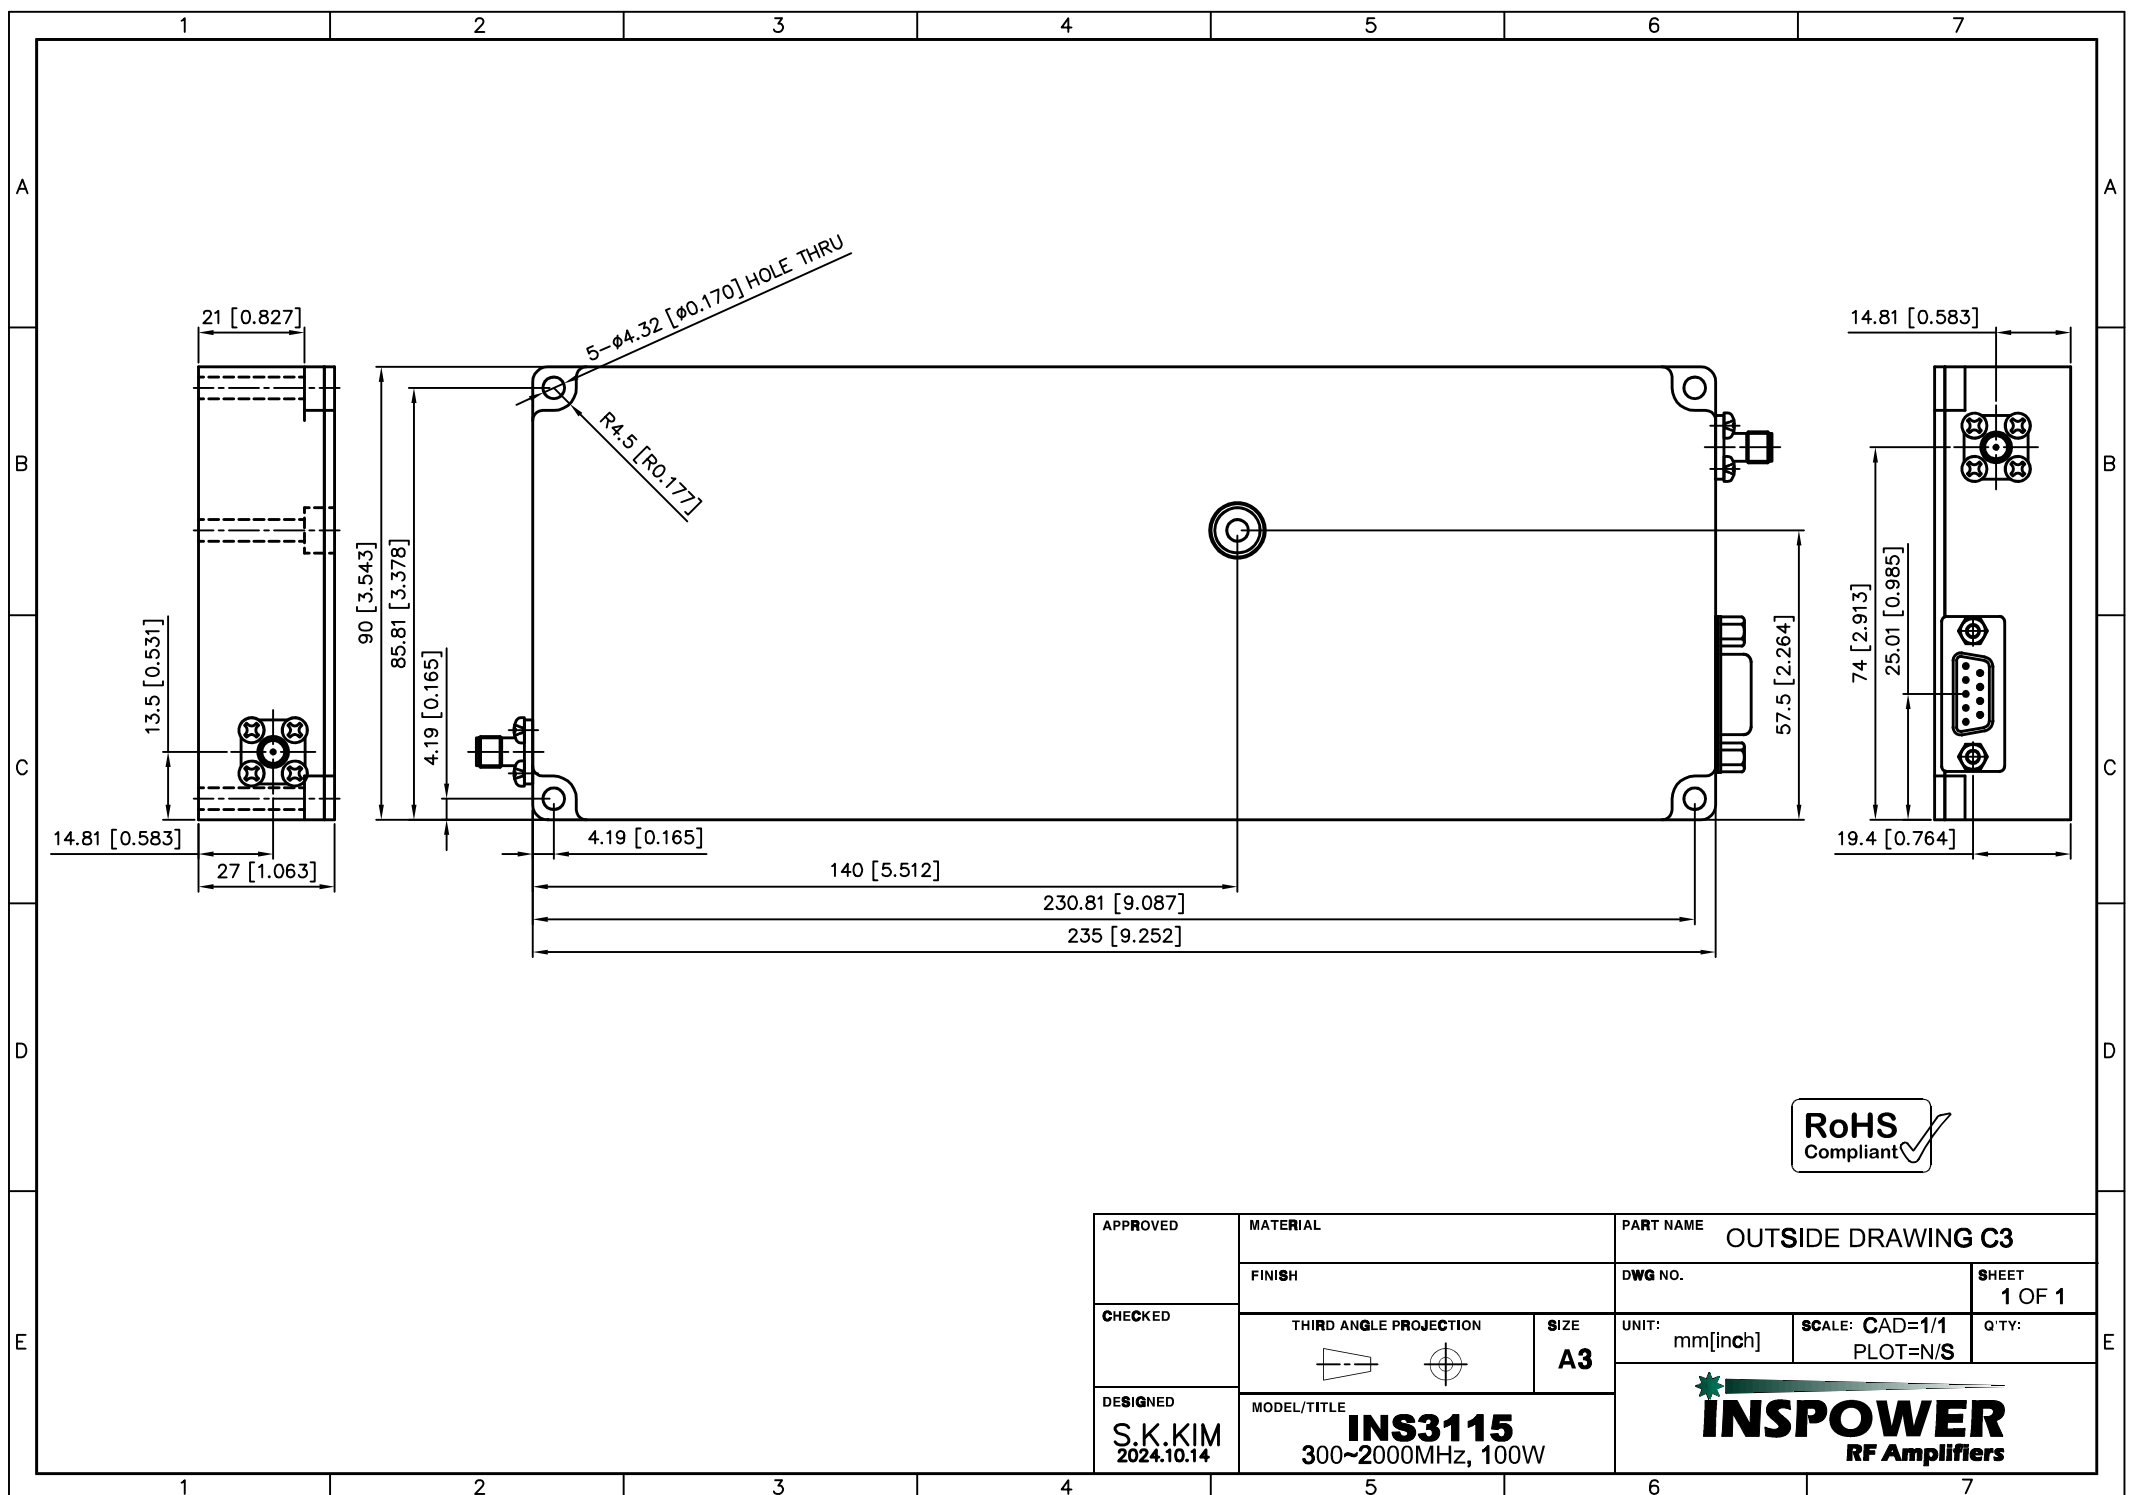

APPROVED	MATERIAL		PART NAME OUTSIDE DRAWING C3	
	FINISH		DWG NO.	SHEET 1 OF 1
CHECKED	THIRD ANGLE PROJECTION		SIZE	UNIT:
			A3	mm[inch]
DESIGNED	MODEL/TITLE		SCALE: CAD=1/1	
	INS3115 300~2000MHz, 100W		PLOT=N/S	
S.K.KIM 2024.10.14		 INSPOWER RF Amplifiers		